
## 1500 GALLON SEPTIC TANK RISER



## **ISOMETRIC VIEW**

SIZE	WEIGHT (LBS)	SPECIFICATIONS
24"X8"	80	Concrete: 4000PSI @ 28 days
24"X12"	120	Reinforcement: ASTM A615/A615M GRADE 60 ASTM A1064/A1064M-16B
24" LID	80	The tank is a monolithic pour (no mid seams). Top Slab is sealed with prostick mastic. The tank is designed to meet HS 20-44 loading requirements.
29" LID	80	
		Reinforced lid - has optional PA inspection port.     Reinforced risers are available.
		• 3 optional inlets and 1 outlet location.
Copyright 2017 EcoStrategies Engineering & Surveying, PLLC		Drawn by P. Beightol - May 2017

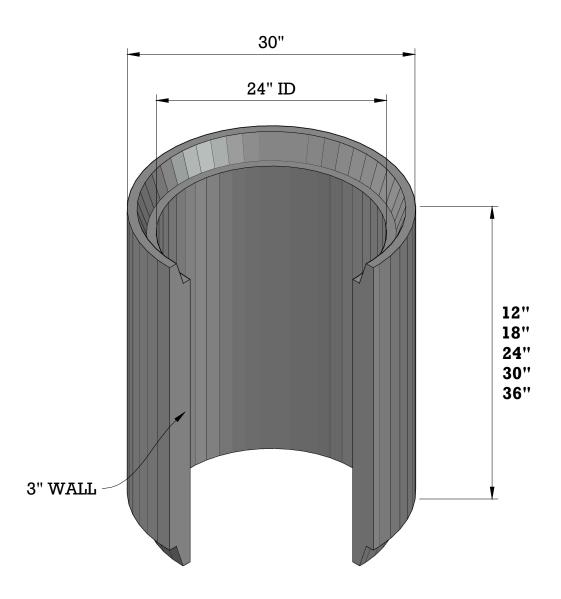