
4-WAY SWITCH GEAR PAD



WEIGHT (LBS)	SPECIFICATIONS
4,000 LBS	Concrete: 4000PSI @ 28 days
	Reinforcement: ———————————————————————————————————
	The tank is a monolithic pour (no mid seams). Top Slab is sealed with prostick mastic. The tank is designed to meet HS 20-44 loading requirements. Reinforced lid - has optional PA inspection port. Reinforced risers are available. of optional inlets and 1 outlet location.

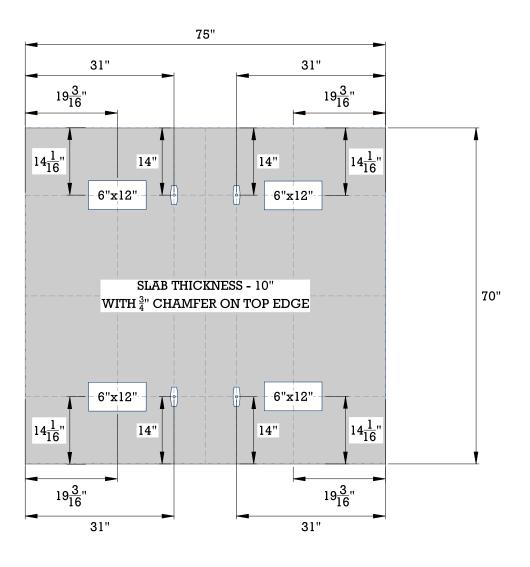